

DEXTER AXLE

TORFLEX AXLE ORDER FORM 600 to 10KHD

Axle Capacity: Complete Axle Idler Beam only (please circle one)

Hub Face:

Outside Bracket:

Brakes: Size: Electric
Hydraulic: Uni-Servo Duo-Servo Free Backing
Parking Brake: Yes No

No: Flange No Flange

Spindle Type: Grease EZ Lube Nev-r-lube Oil

Cartridge Size

Bolt Pattern: 4 on 4 5 on 4.50 5 on 4.50 5 on 4.75 5 on 5.00
(5.5 dia idler) (6.5 dia idler)
5 on 5.50 6 on 5.50 8 on 6.5 (stud size 8 on 6.5 only)
1/2 5/8 or 9/16"

Start Angle Degree: 45 Down 32 Down 22.5 Down 10 Down

Zero 10Up 22.5 Up

Bracket Orientation: LP Std (I) LP Rev (O) HP Std (I) HP Rev (O)

3" HP Std (I) or 3" HP Rev (O) NOTE:: 3" HP is only available on #9 & #10 Torflex models

Attaching Parts Kit: Side Mount Top Mount



If due to a customer error.....

Dexter generally does not accept return of axles and/or beam assemblies unless a special restocking charge has been agreed upon. The standard restocking charge for these items is 50%. Axles and beams are items that have been custom made to specific order. This potentially, results in many components being scrapped. The customer will be responsible for freight incurred for the return.

Customer Signature:

Date:


TORFLEX

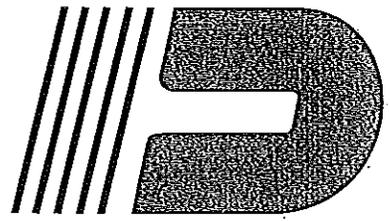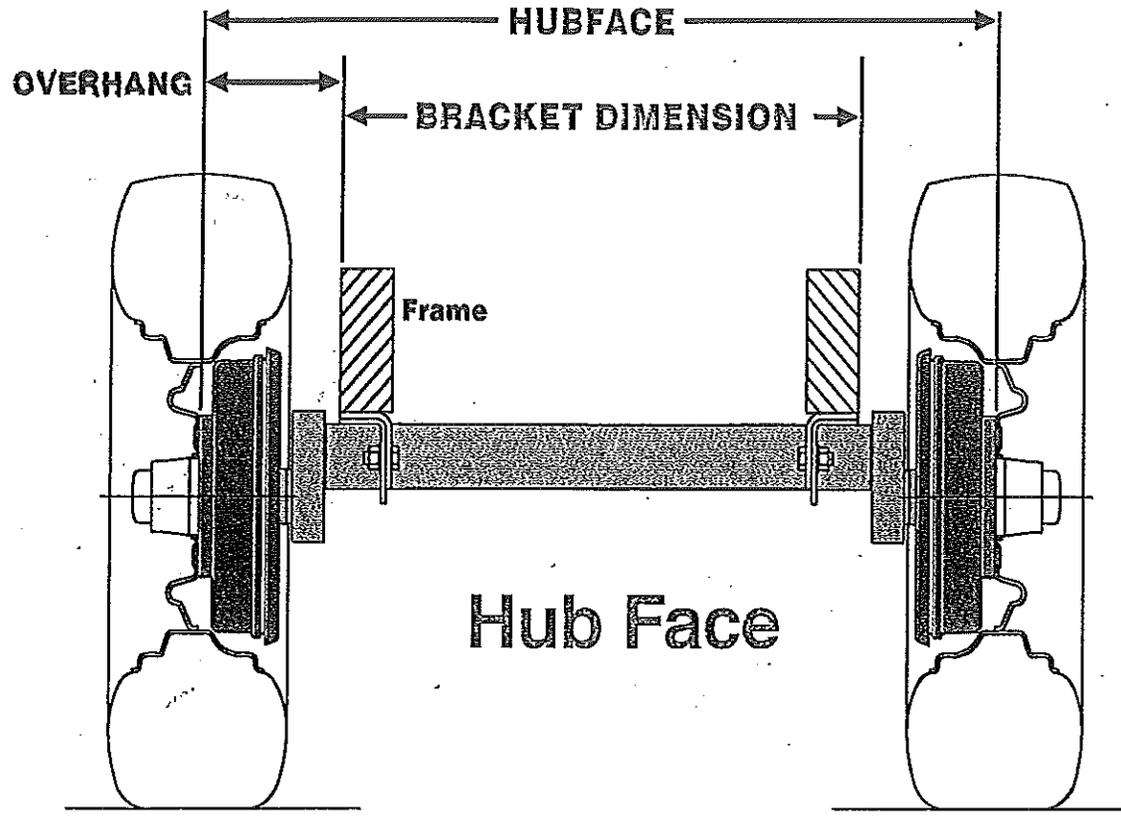


DEXTER AXLE

www.dexteraxle.com


Hi PROFILE IN BOARD

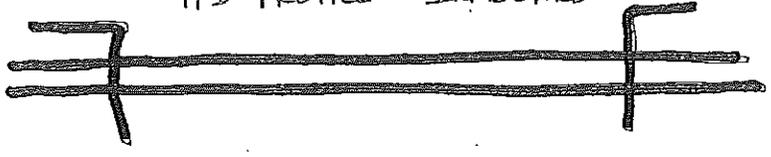

Lo PROFILE IN BOARD

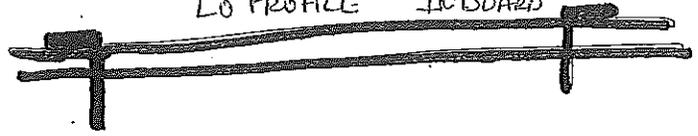


Hi PROFILE Reverse

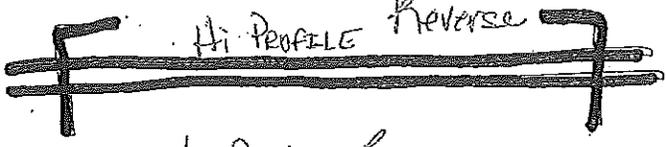

Lo Profile Reverse



HIGH PROFILE BRACKETS ARE APPROX 1" HIGHER THAN TUBE

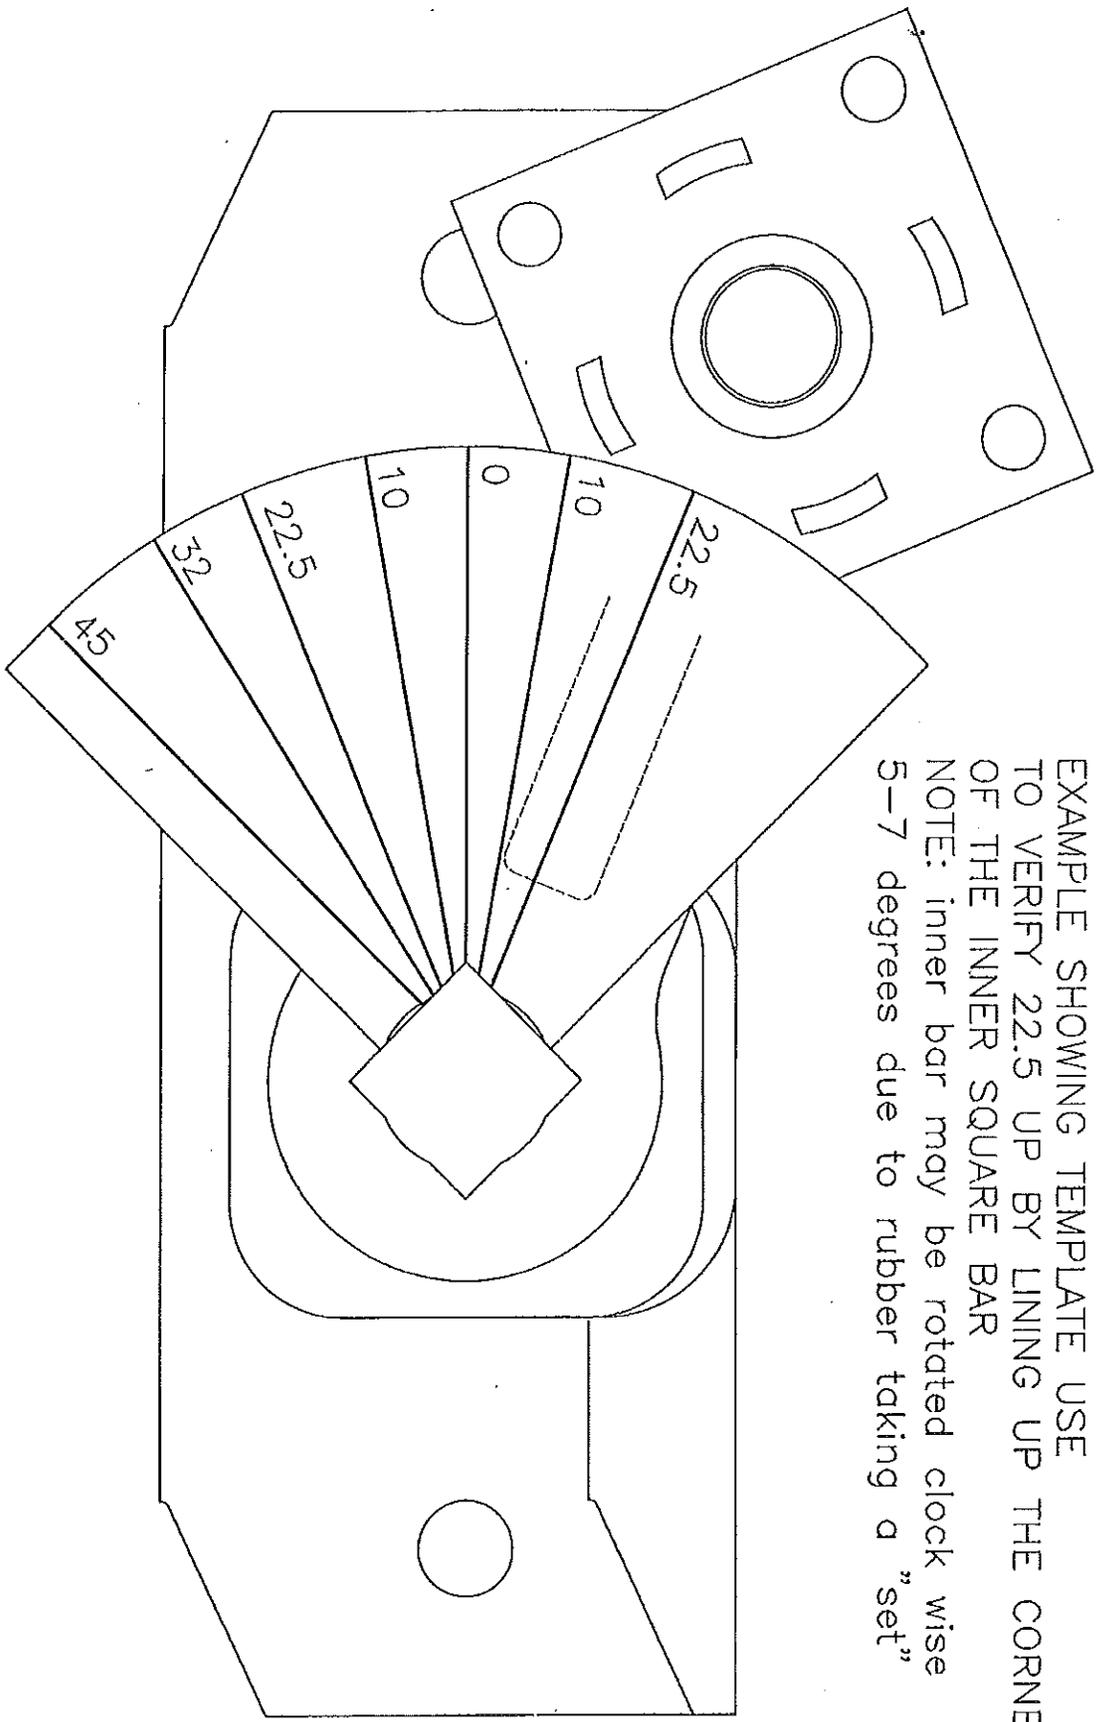

EXAMPLE SHOWING TEMPLATE USE
TO VERIFY 22.5 UP BY LINING UP THE CORNER
OF THE INNER SQUARE BAR
NOTE: inner bar may be rotated clock wise
5-7 degrees due to rubber taking a "set"

TEMPLATE FOR
LEFT HAND
TORSION ARMS

